
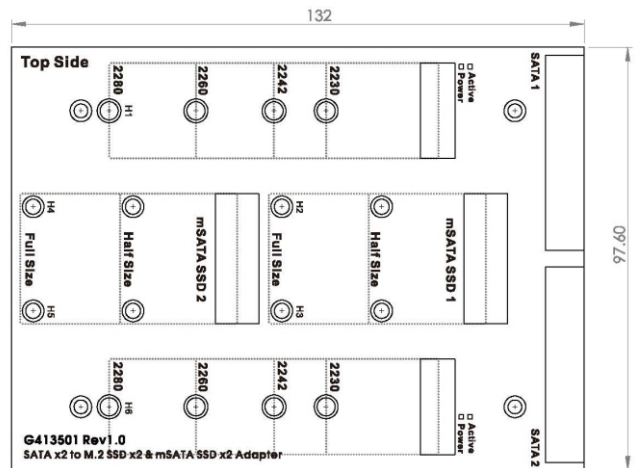


# SATA III x2 to mSATA & M.2 (SATA I/F) SSD x2

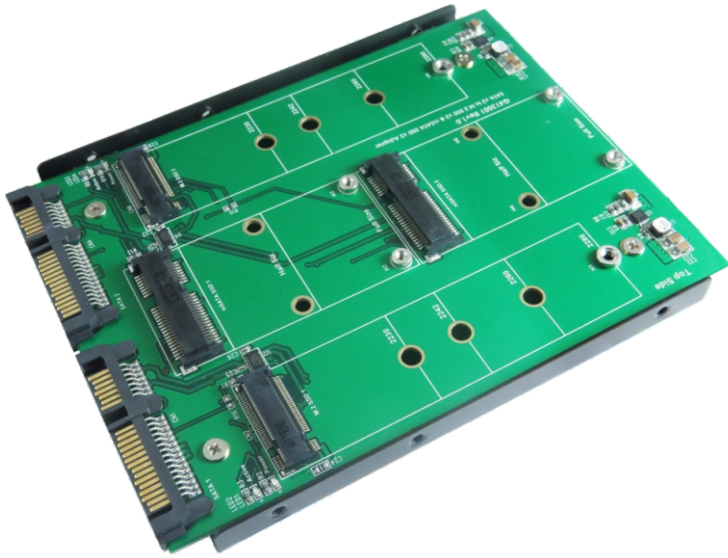

## Features

- ※ Build in Mini PCI-e Female x2 connector
- ※ Build in M.2 B-key Female x2 connector
- ※ Provide independent Power for M.2 SSD & mSATA SSD
- ※ PWM synchronous buck converter Power IC
  - ◎ 3A maximum output current
  - ◎ Short circuit protection
  - ◎ In-rush current suppression
  - ◎ Thermal shutdown protection
  - ◎ ESD HBM (Human Body Mode) / 2KV
- ※ LED1,LED4 Green LED on indicates SSD Power ready status
- ※ LED2,LED3 Red LED Blinking indicates SSD active status

## Specifications

- ※ Support SATA Reversion 3.2
- ※ Compliant with PCI Express M.2 Specification Version 1.0

## mSATA SSD Form Factor Support :

- ※ Full size: 50.95 mm (L) x 30mm (W)
- ※ Half size: 26.8 mm (L) x 30 mm (W)

## M.2 SSD Form Factor Support :

- ※ Type 2230-D2-B-M:30mm(L) x 22mm(W)
- ※ Type 2242-D2-B-M:42mm(L) x 22mm(W)
- ※ Type 2260-D2-B-M:60mm(L) x 22mm(W)
- ※ Type 2280-D2-B-M:80mm(L) x 22mm(W)