



# MINERVA

## AU404A / Rev1.1 Converter Card

---

### Performance & Burn In Test Rev. 2.0

#### Table of Contents

---

##### 1. Overview

##### 2. Performance Measurement Tools and Results

2.1 Test Platform

2.2 Test target and Used M.2 NVMe SSD

2.3 Install Hardware

2.4 Windows 10 OS environment setup

2.5 CrystalDiskMark 5.1.2 x64 performance test

2.6 AS SSD Benchmark 1.9 performance test

2.7 ATTO Disk Benchmark 2.47 performance test

2.8 AnvilBenchmark\_V110\_B337 Benchmark performance test

##### 3. Burn In Tests and Results

3.1 BurnInTestv8.1 Pro burn in test

##### 4. Summary

# AU404A/Rev1.1 Converter Card

---

## 1. Overview


AU404A, built-in mini SAS HD(SFF-8643) connector, U.2(SFF-8639) connector, provide a port **M.2 M-key** connector. First M.2(PCIe) SSD inserts into M.2 connector, use Mini SAS HD cable, connected AU404A to the PCI-e to Mini SAS HD(SFF-8654) adapter, M.2(NVMe) SSD can be work.

## 2. Tools and Results of Performance Measurement

### 2.1 Test Platform

M/B : GIGABYTE **Z170X UD5 TH**  
CPU : Intel **i5-6500**, 3.2GHz/ 6M Cache/ LGA1150  
Memory : Kingston **KVR21N15D8/8**, **DDR4-2133MHz**, 16GB(8GB DIMM\*2)  
ATX Power : FSP RAIDER 550, **550W ATX**, 12V V2.2 Power Supply  
Graphic : Z170 Chipsets built-in **HD Graphics 530**  
Adapter: PE0405 PCIe to SFF-8654 Slimline SAS Adapter  
CABLE: Amphenol U.2(SFF-8639) to SFF-8654 Slimline SAS Cable  
OS : Microsoft **Windows 10 64bit OS**

### 2.2 Test target: AU404A adapter and [Samsung SM961 512GB NVMe SSD](#)

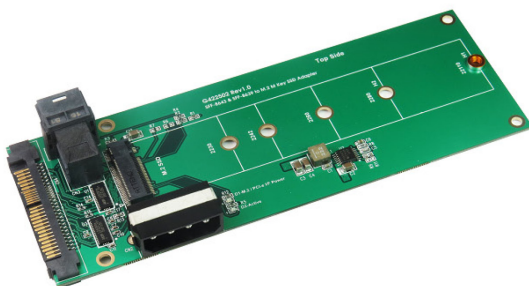

AU404A Adapter



SFF-8639 to SFF-8654 Cable



Samsung SM961 M.2 SSD

### 2.3 Install Hardware

Insert M.2 SSD into AU404A converter's M.2 connector, and then with coppers, and screws to fix SSDs. (Please refer to the Installation Notes). Connect AU404A converter to PE0405 adapter(PCI-e to Slimline SAS SFF-8654), Plug PE0404 into **PCI-e slot of GIGABYTE Z170X UD5 TH.**

### 2.4 BIOS & Windows 10 OS environment setup


- 2.4.1.1 Install Windows 10 OS. Don't install any program.
- 2.4.1.2 AU404A+SM961 SSD Formatted NTFS

# AU404A/Rev1.1 Converter Card

## 2.5 CrystalDiskMark 5.1.2 x64 performance test

※Benchmark (Sequential **Read & Write** / default = **1MB**)


2.5.1 Show **M.2(NVMe) Samsung SM961/512GB** performance as below:

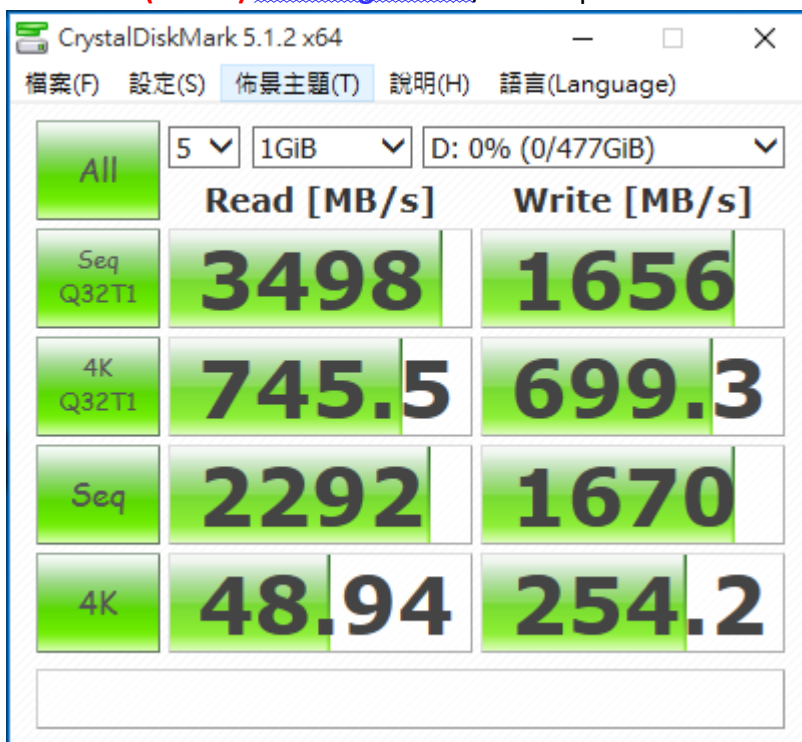

## 2.6 AS SSD Benchmark 1.9 performance test

※Benchmark (**Read & Write** by MB/s, default block size = **16MB**)


2.6.1 Show **M.2(NVMe) Samsung SM961/512GB** performance as below:

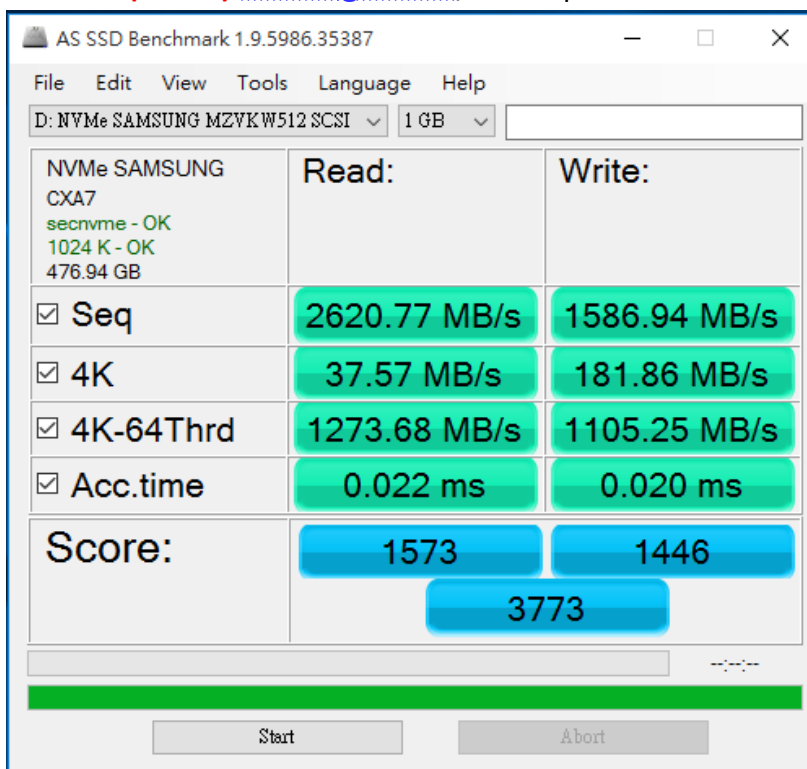

# AU404A/Rev1.1 Converter Card

## 2.7 ATTO Disk Benchmark 2.47 performance test

2.7.1 Show **M.2(NVMe) Samsung SM961/512GB** performance as below:

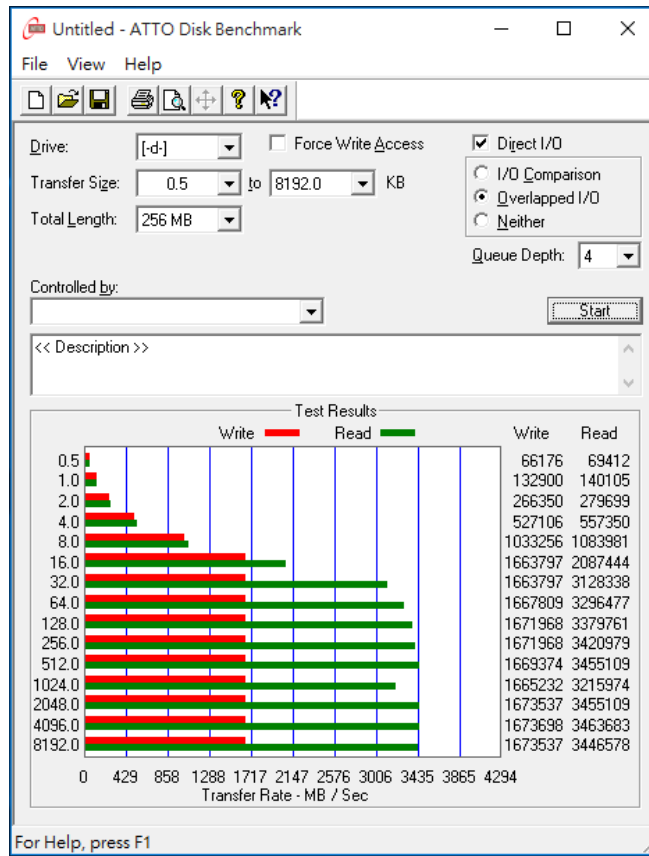

## 2.8 AnvilBenchmark\_V110\_B337

2.8.1 Show **M.2(NVMe) Samsung SM961/512GB** performance as below:





# AU404A/Rev1.1 Converter Card

## 3. Burn In Tests and Results

### 3.1 BurnInTest v8.1 Pro


Shows in Samsung **M.2(NVMe) Samsung SM961/512GB**

3.1.1 **system information** as below:

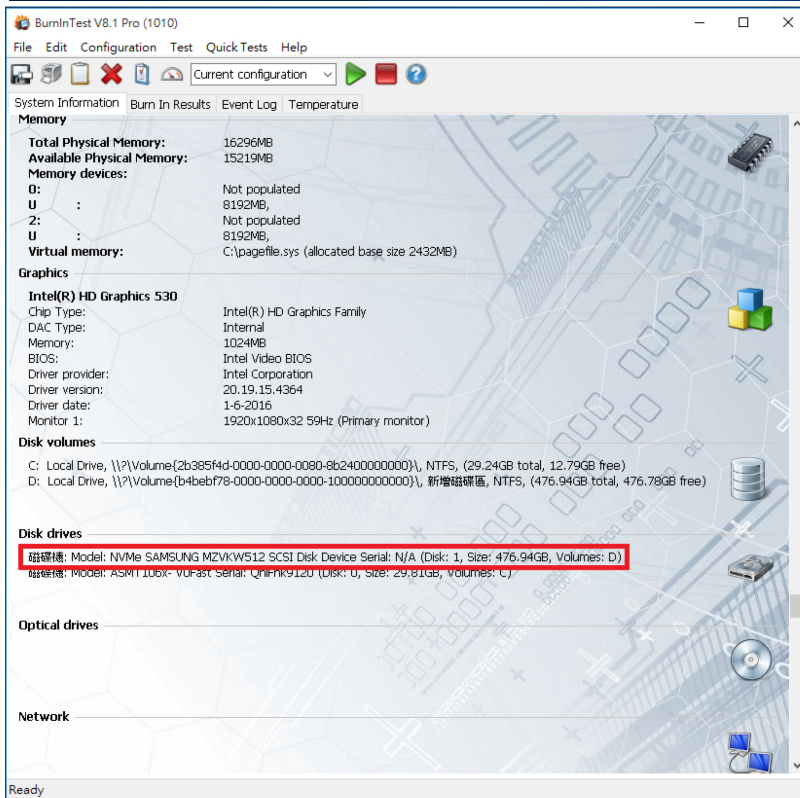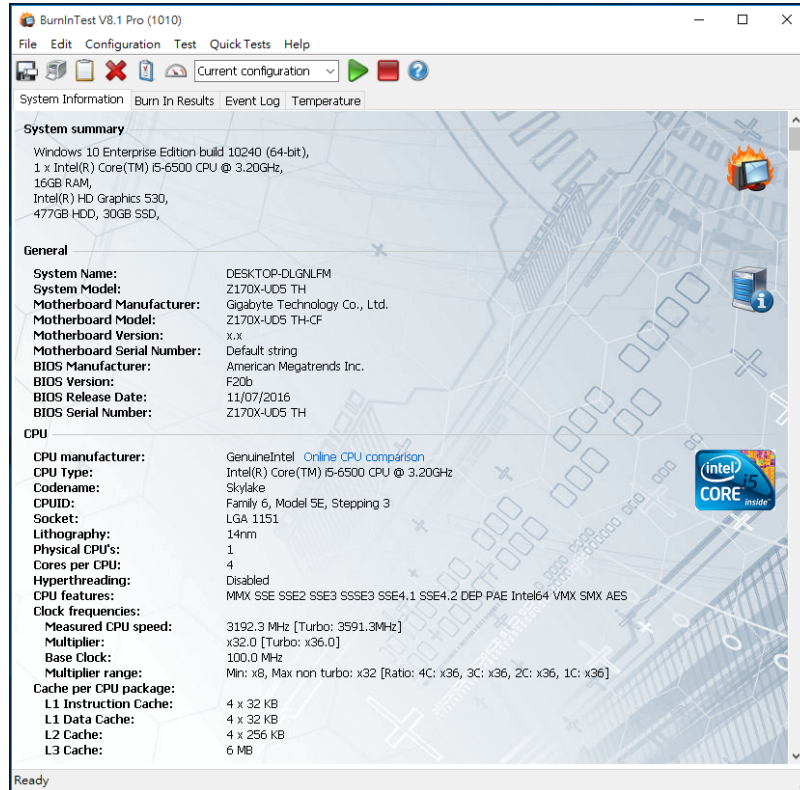


# AU404A/Rev1.1 Converter Card

## 3.1.2 show Disk test mode( 10 ways cycle test)

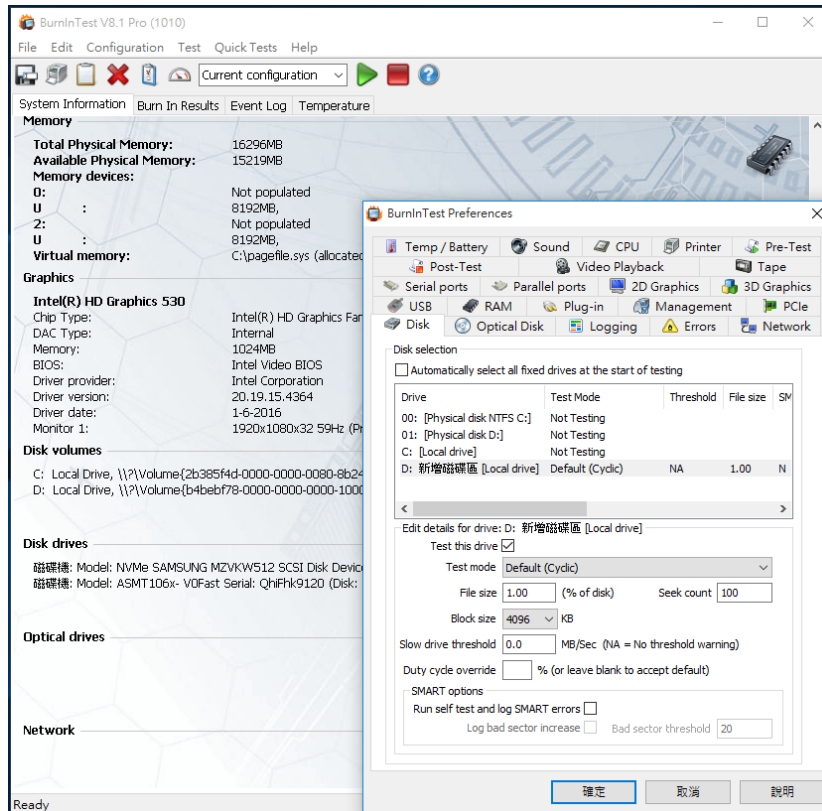

## 3.1.3 show 24-hour Burn-in test PASSED

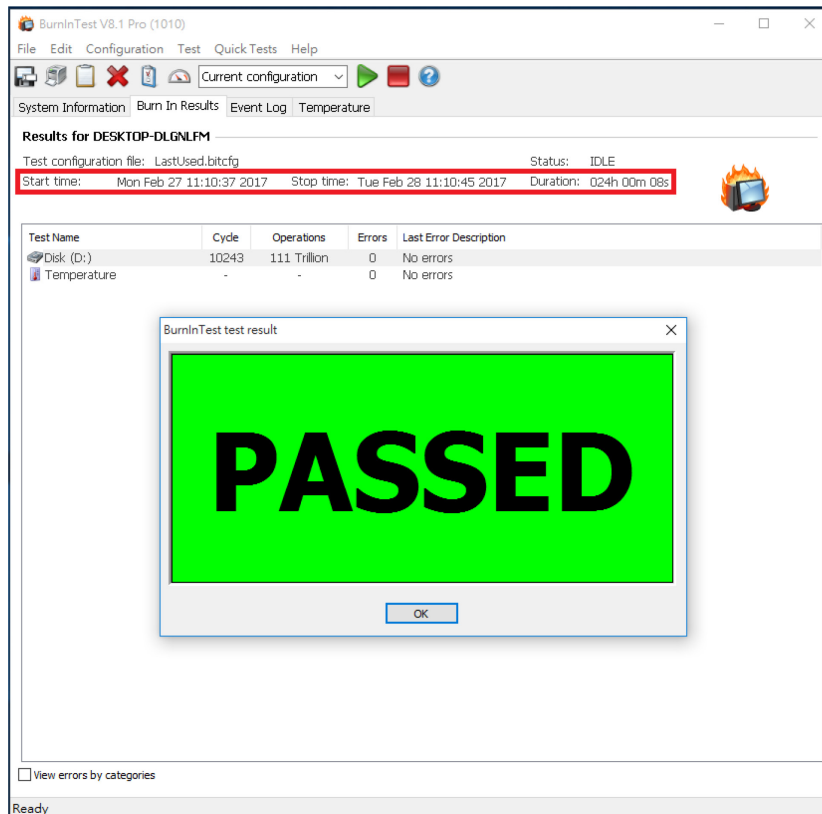

# AU404A/Rev1.1 Converter Card

---

## 4. Summary

- 4.1 M.2 NVMe SSD is PCI-e Gen 3 / 4 Lane Interface, I/O speed, max. to 4GB/s.
- 4.2 AU404A adapter I/O performance is based on M.2 NVMe SSD.