

ADAPTER

SATA Express to M.2 B-Key 2 ports



Features

- Build in SFF-8639 Female connector
- Build in M.2 NGFF Female connector
- PWM synchronous buck converter Power IC
 - ※3A maximum output current
 - ※Short circuit protection
 - ※In-rush current suppression
 - ※Thermal shutdown protection
 - ※ESD HBM (Human Body Mode)/2KV
- D1, D4 Green LED on indicates SSD Power ready
- D2, D3 Red LED Blinking indicates SSD active status

Specifications


- SATA Reversion 3.2
- PCI Express M.2 Specification Version 1.0
- SSD_Form_Factor_Version1_a
- SFF-8639 Rev 2.0

Support M.2 B-key Form Factor

- Type 2280-D2-B-M: 80mm(L) x 22mm(W)
- Type 2260-D2-B-M: 60mm(L) x 22mm(W)
- Type 2242-D2-B-M: 42mm(L) x 22mm(W)
- Type 2230-D2-B-M: 30mm(L) x 22mm(W)

Notice:

System could show two M.2 SATA SSD drive independently.

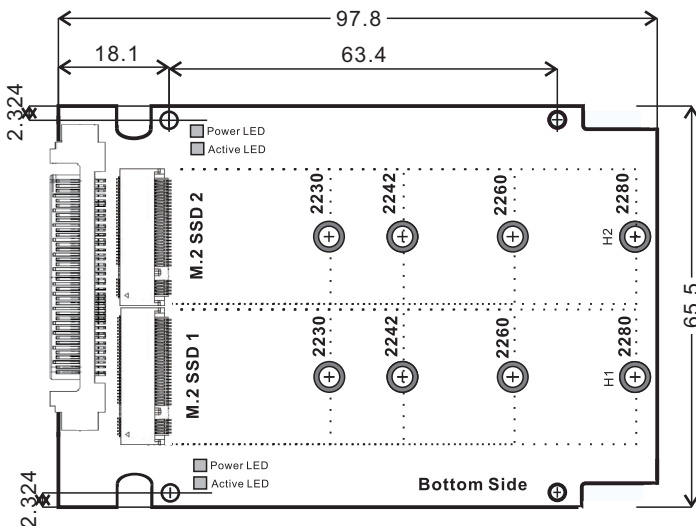

with standard 2.5" Aluminum Housing

SATA
Express

M.2
M-Key

2.5"
Standard

