ADAPTER

SATA Express to mSATA 2 ports

Features

- Build in ASM1062R H/W controller
- Supports up to two lane of PCI Express
- Supports SATA Express SRIS(Separate RefClk Independent SSC)
- Build in SFF-8639 male connector
- Build in 2-port Mini PCI-e Female connector
- PWM synchronous buck converter Power IC
  ※3A maximum output current
  ※Short circuit protection
  ※In-rush current suppression
  ※Thermal shutdown protection
  ※ESD HBM (Human Body Mode)/2KV
- D1, D4 Green LED on indicates SSD Power ready
- D2, D5 Green LED Blinking indicates SSD active status
- D3, D6 Red LED indicates SSD normal & error status

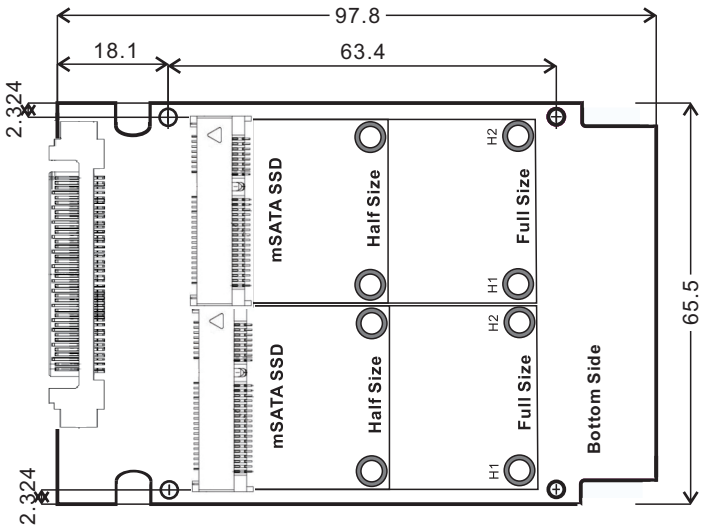

with standard 2.5" Aluminum Housing

Specifications

- SATA Reversion 3.2
- SSD_Form_Factor_Version1_a
- SFF-8639 Rev 2.0

Support mSATA Form Factor

- Full size: 50.95 mm (L) x 30mm (W)
- Half size: 26.8 mm (L) x 30 mm (W)

SATA Express

mSATA

2.5" Standard