


PCIe Gen3 / 4-Lane to M.2 NVMe SSD Adapter

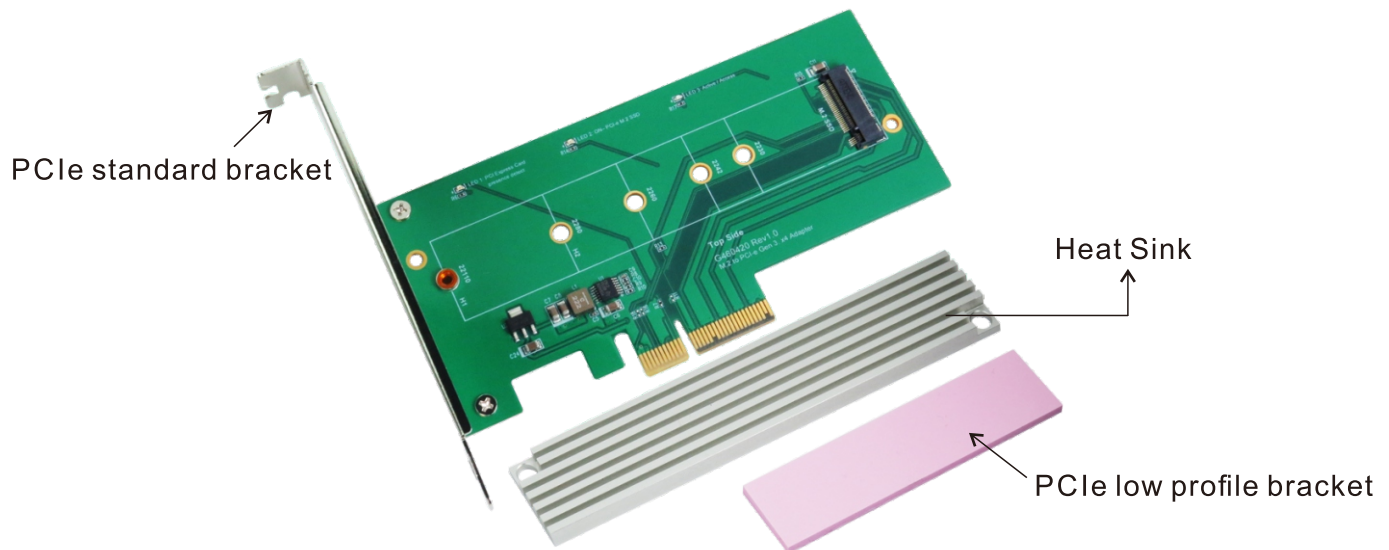

Features

- ※ M.2 NVMe to PCIex4 Gen3 convert
- ※ Build in M.2 M-key Female connector
- ※ PWM synchronous buck converter Power IC
 - 4A maximum output current
 - Short circuit protection
 - In-rush current suppression
 - Thermal shutdown protection
 - ESD HBM (Human Body)
- ※ Supports 3.3V SMB_CLK
- ※ Supports 3.3V SMB_DATA
- ※ Supports 3.3V CLKREQ
- ※ D1 Green LED on indicates PE0408 Add-in card ready
- ※ D2 Green LED on indicates M.2 NVMe SSD power ready
- ※ D3 RED LED Blinking indicates M.2 SSD active status

Specifications

- ※ Compliant with NVMe Express 1.0a
- ※ Support PCI Express Base Specification Rev 3.0
- ※ Support SSD_Form_Factor_Version1_a
- ※ Compliant with PCI Express M.2 Specification Version 1.0

Support M.2 SSD Form Factor

- ※ Type 2230-D2-B-M: 30mm(L) x 22mm(W)
- ※ Type 2242-D2-B-M: 42mm(L) x 22mm(W)
- ※ Type 2260-D2-B-M: 60mm(L) x 22mm(W)
- ※ Type 2280-D2-B-M: 80mm(L) x 22mm(W)
- ※ Type 22110-D2-B-M: 110mm(L) x 22mm(W)