



2-lane , PCI-e Gen2 for mSATA 2-port & M.2 2-port

Notice:

- ✧ If you insert both mSATA SSD and M.2 SSD at the same time, only M.2 SSD can be detected.
- ✧ If you only insert mSATA SSD, mSATA SSD can be detected.
- ✧ If you insert M.2 SSD, M.2 SSD can be detected.

Four main function modes:

- ✧ RAID mode: RAID 0
- ✧ RAID mode: RAID 1
- ✧ RAID mode: JBOD
- ✧ RAID mode: AHCI mode (two SSD are used as the Individual two drives)


Recommended:

RAID 0 mode, install either two mSATA SSD or two M.2 SSD. Please use the same brand, the same capacity to avoid errors.

Installation Procedure:

Step 1:

Power on --- Show the screen as follow:

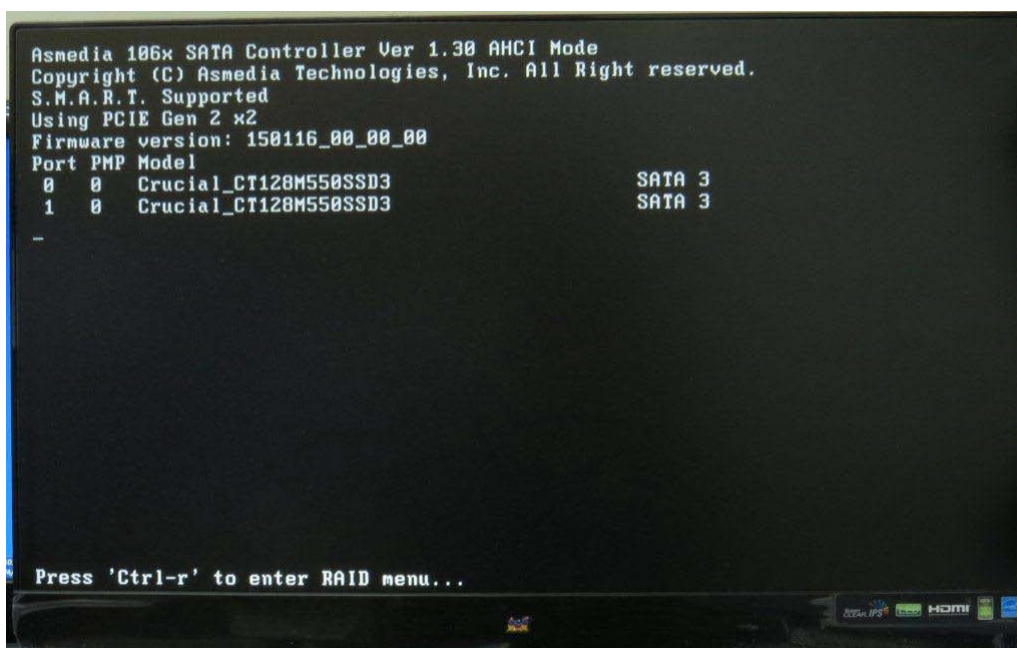

PR9401 Usage


Step 2:

Press "CTRL+R" Keys to enter Raid menu as below:



Step 3:

Press "Enter" key into RAID & AHCI mode setting as below:

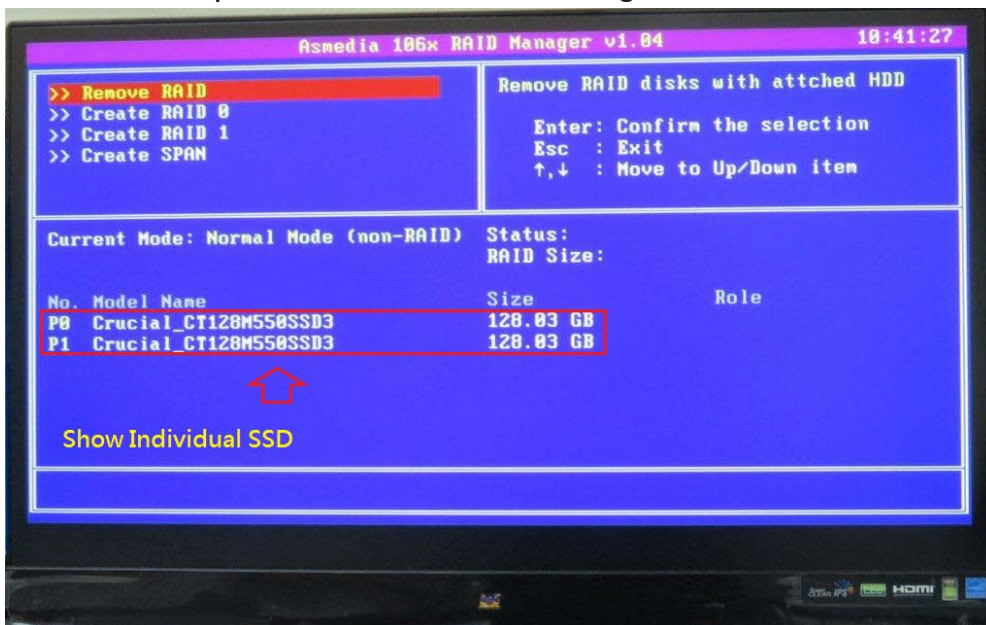

Show 4 mode Options:


- >> Remove RAID (Select this mode, indicates AHCI)
- >> Create RAID 0
- >> Create RAID 1
- >> Create SPAN (Select this mode, indicate JBOD)

PR9401 Usage

Step 4:


Use arrow keys to select the mode, then press "Enter" to confirm mode

Select "Created RAID 0" as an example

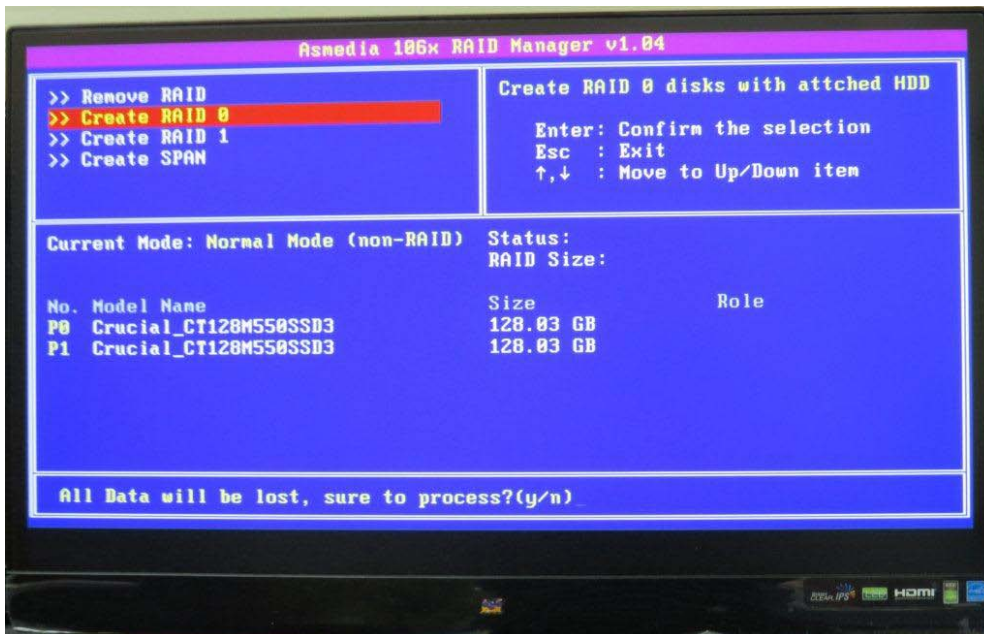

Step 5:


Press "Y" into RAID 0 mode setting.....

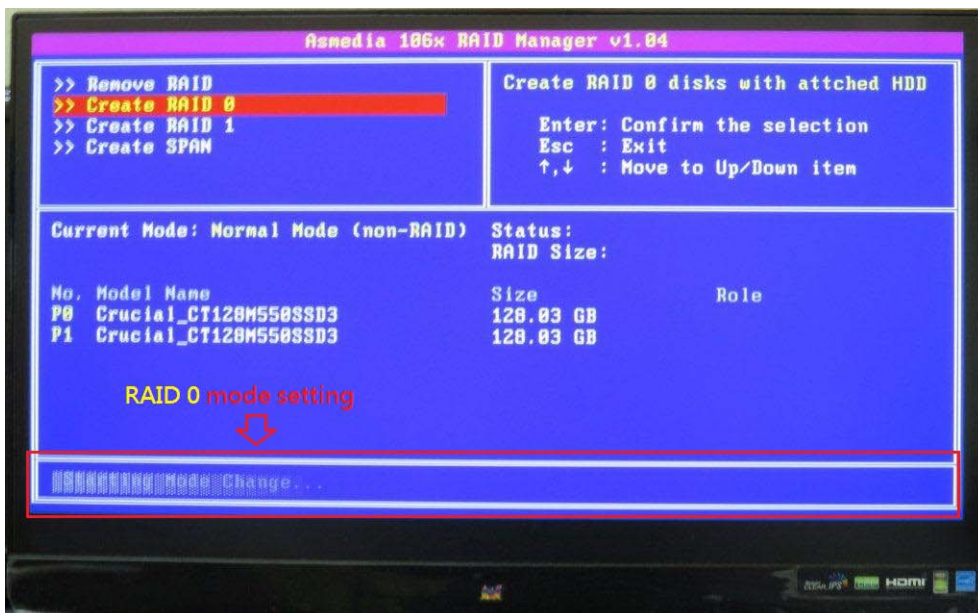

PR9401 Usage

Step 6:

Show " Mode Change is completed"

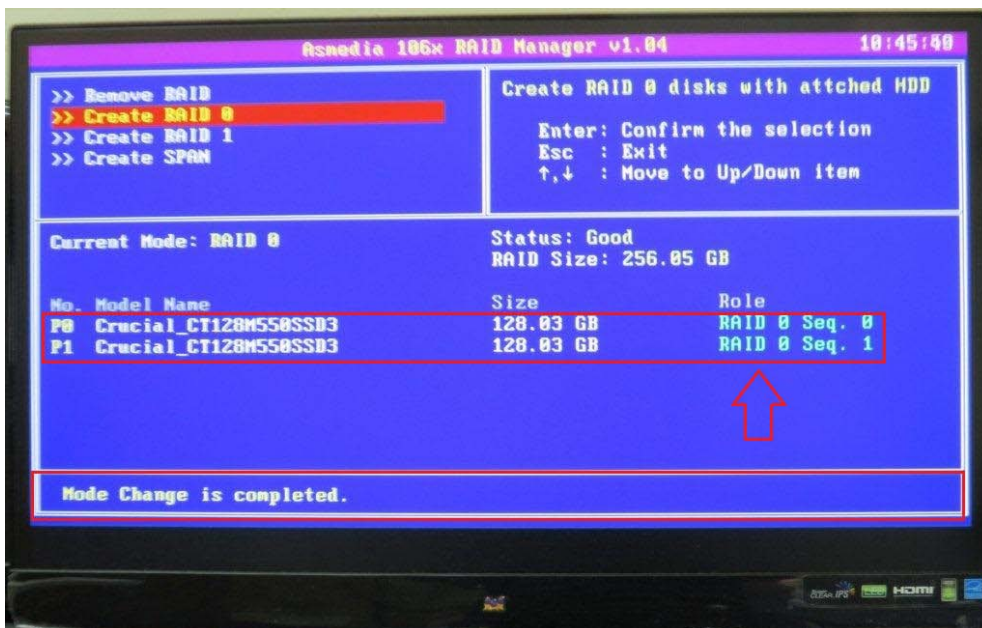

Step 7:


Press "Esc" to leave configure



PR9401 Usage

Step 8:

Press "y" to leave configure

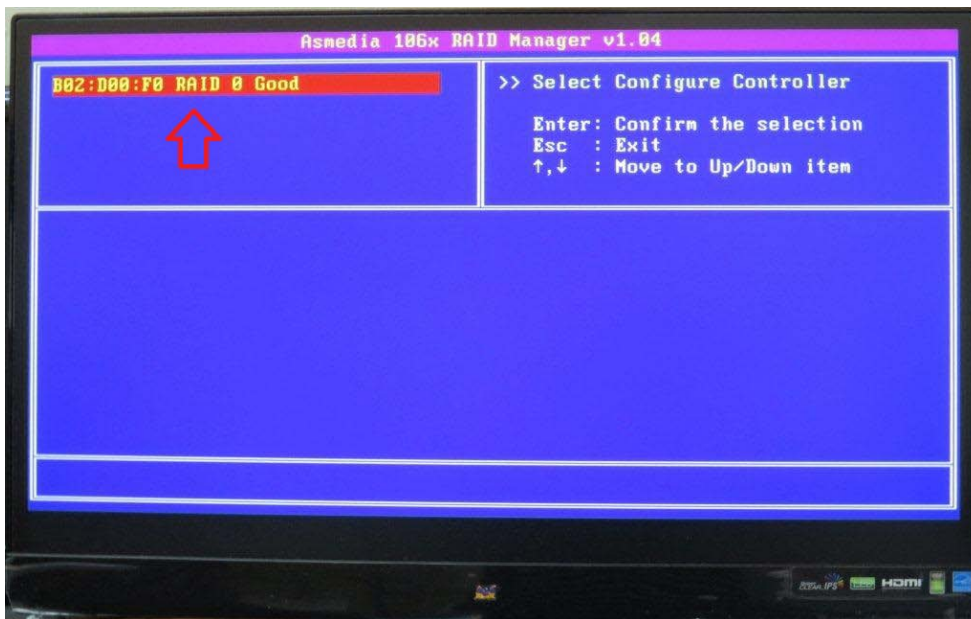

Step 9:

Press "Esc" to reset COMPUTER as below:

