

2 IN 1

2.5" SATA III to mSATA SSD & CFast Card



Features

- mSATA to SATA convert
- CFast to SATA convert
- Build in Mini PCIe Female connector
- Build in CFast connector
- PWM synchronous buck converter Power IC
 - ※4A maximum output current
 - ※Short circuit protection
 - ※In-rush current suppression
 - ※Thermal shutdown protection
 - ※ESD HBM (Human Body Mode)/2KV
- LED1 Green LED on indicates mSATA & CFast power ready
- LED2 RED LED Blinking indicates mSATA SSD active status

Specifications

- Compliant with SerialATA_Revision_3_2_Gold
- Support PCI_Express_miniCard_Electromechanical_specs_rev1.2
- Support CFast specification 2.0


Support CFast Card Form Factor

- Physical Spec:
36.4 mm (L) x 42.8mm (W) x 3.3mm (Thickness)

Support mSATA Form Factor

- Full size: 50.95 mm (L) x 30mm (W)
- Half size: 26.8 mm (L) x 30 mm (W)

Notice: mSATASSD or CFast Card, only one can work, mSATA SSD would be priority.

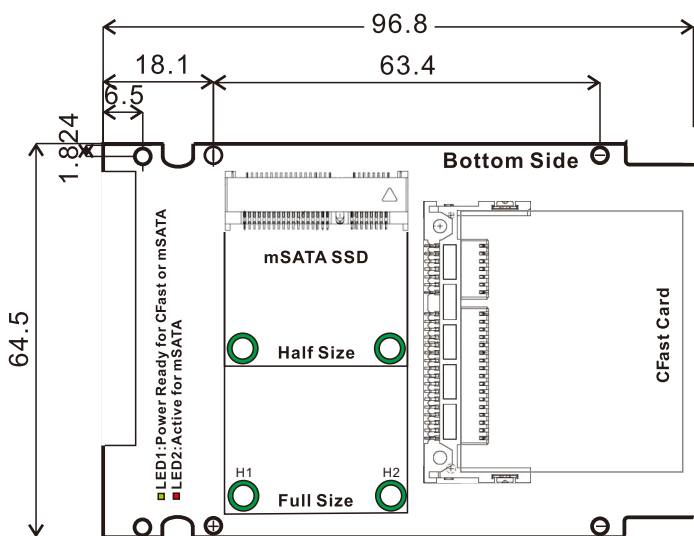

with standard 2.5" Aluminum Housing

2.5
Inch

mSATA

CFast
Card

