

2 IN 1

2.5" SATA III to M.2 SSD & CFast Card



Features

- M.2 SATA to SATA convert
- CFast to SATA convert
- Build in M.2 B-key connector
- Build in CFast connector
- PWM synchronous buck converter Power IC
 - ※4A maximum output current
 - ※Short circuit protection
 - ※In-rush current suppression
 - ※Thermal shutdown protection
 - ※ESD HBM (Human Body Mode)/2KV
- LED1 Green LED on indicates M.2 SATA & CFast power ready
- LED2 RED LED Blinking indicates M.2 SATA SSD active status

Specifications


- Compliant with SerialATA_Revision_3_2_Gold
- PCI Express M.2 Specification Version 1.0
- Support CFast specification 2.0

Support CFast Card Form Factor

- Physical Spec:
36.4 mm (L) x 42.8mm (W) x 3.3mm (Thickness)

Support M.2 Form Factor

- Type 2230-D2-B-M: 30mm(L) x 22mm(W)
- Type 2242-D2-B-M: 42mm(L) x 22mm(W)
- Type 2260-D2-B-M: 60mm(L) x 22mm(W)
- Type 2280-D2-B-M: 80mm(L) x 22mm(W)

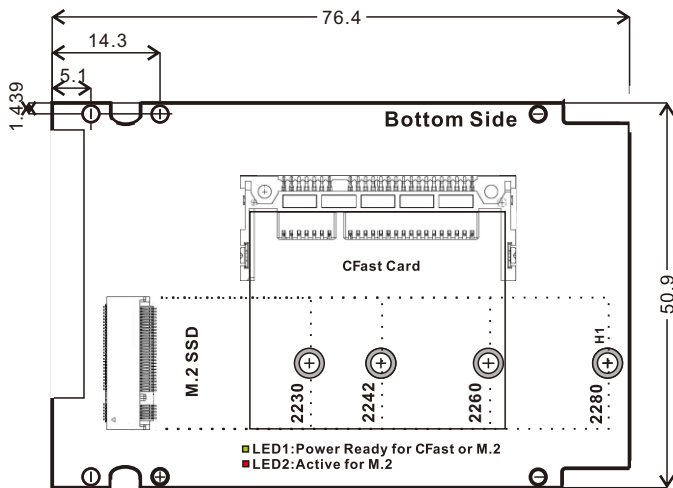

with standard 2.5" Aluminum Housing

Notice: M.2 SSD or CFast Card, only one can work, M.2 SSD would be priority.

2.5
Inch

M.2
SSD

CFast
Card

