
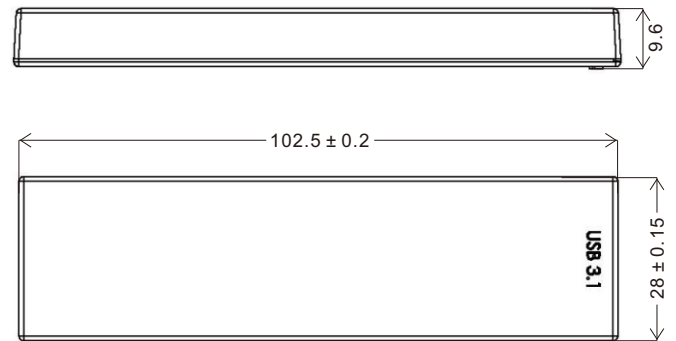


# USB 3.1 Gen2 micro B to M.2 (SATA I/F) SSD

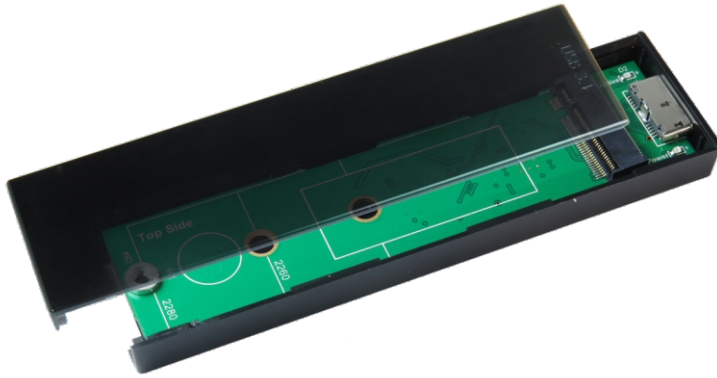

micro B type

## Features

- ※ Build in ASM1351 USB 3.1 high performance processor
- ※ Build in M.2 B-key Female connector
- ※ PWM synchronous buck converter Power IC
  - ⊙ 3A maximum output current
  - ⊙ Short circuit protection
  - ⊙ In-rush current suppression
  - ⊙ Thermal shutdown protection
  - ⊙ ESD HBM (Human Body Mode) / 2KV
- ※ D1 Green LED on indicates SSD Power ready
- ※ D2 Red LED Blinking indicates SSD active status

## Specifications

- ※ Compliant with USB 3.1 Specification Revision 1.0
- ※ Support UASP and Mass Storage Class Overview Rev1.4
- ※ Support SATA Reversion 3.2
- ※ Compliant with PCI Express M.2 Specification Version 1.0

## M.2 SSD Form Factor Support :

- ※ Type 2230-D2-B-M:30mm(L) x 22mm(W)
- ※ Type 2242-D2-B-M:42mm(L) x 22mm(W)
- ※ Type 2260-D2-B-M:60mm(L) x 22mm(W)
- ※ Type 2280-D2-B-M:80mm(L) x 22mm(W)