



USB 3.1 mirco B to M.2 (B-key) x2 RAID Card

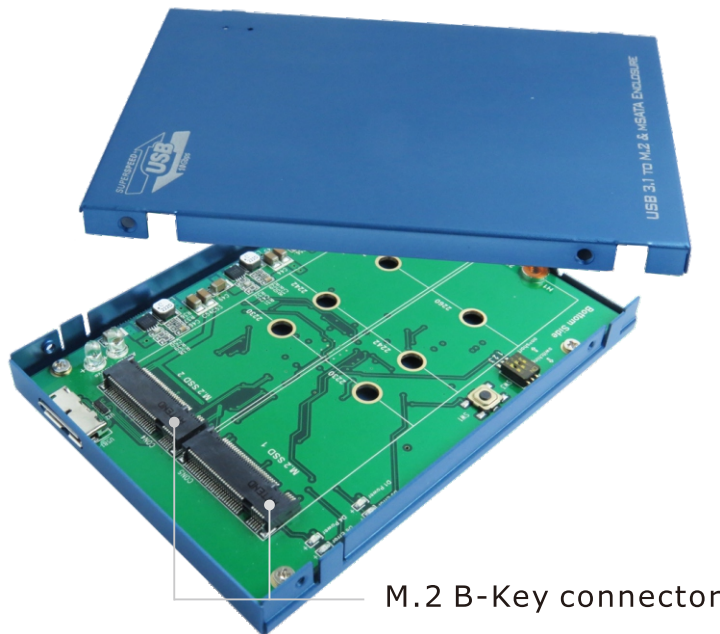

M.2 B-Key connector

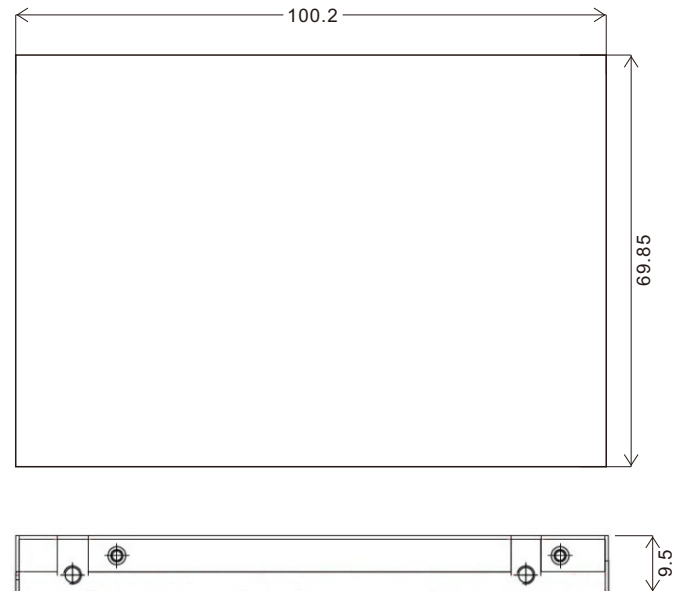

Standard 2.5" Form factor

Features

- ※ Built in ASM1352R USB 3.1 / 10Gbps high performance processor
- ※ Built in M.2 NGFF B-Key Female connector x2
- ※ Provide independent Power for M.2 SSD
- ※ Each port M.2 supports PWM synchronous Power IC
 - ◎ 3A maximum output current
 - ◎ Short circuit protection
 - ◎ In-rush current suppression
 - ◎ Thermal shutdown protection
 - ◎ ESD HBM (Human Body Mode) / 2KV
- ※ D2, D5 Green LED Blinking indicates M.2 active status

Specifications

- ※ Compliant with USB 3.1 Specification Revision 1.0
- ※ Support UASP and Mass Storage Class Overview Rev1.4
- ※ Support SATA Reversion 3.2
- ※ Compliant with PCI Express M.2 Specification Version 1.0

M.2 SSD Form Factor Support :

- ※ Type 2230-D2-B-M:30mm(L) x 22mm(W)
- ※ Type 2242-D2-B-M:42mm(L) x 22mm(W)
- ※ Type 2260-D2-B-M:60mm(L) x 22mm(W)
- ※ Type 2280-D2-B-M:80mm(L) x 22mm(W)