


# USB 3.1 mirco B to mSATA SSD & CFast Card

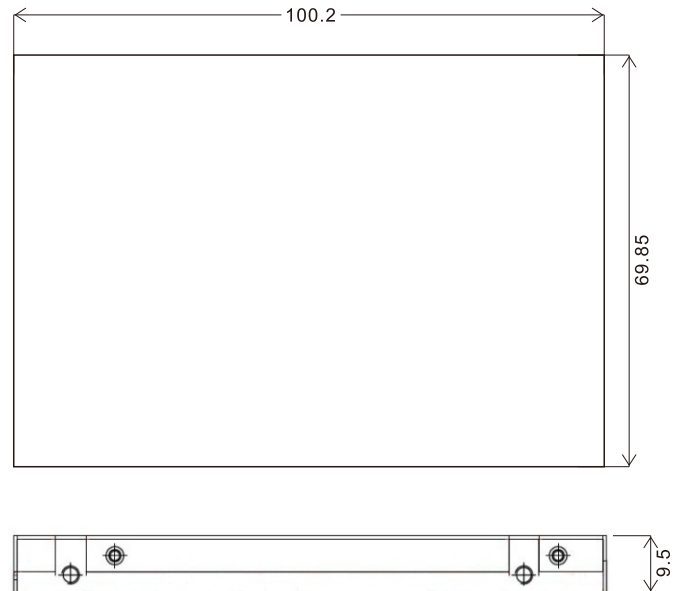

Standard 2.5" Form factor

## Features

- ※ Built in ASM1351 USB 3.1 / 10Gbps high performance processor
- ※ Built in mini PCIe Female connector
- ※ Built in CFast Female connector
- ※ PWM synchronous buck converter Power IC
  - ◎ 3A maximum output current
  - ◎ Short circuit protection
  - ◎ In-rush current suppression
  - ◎ Thermal shutdown protection
  - ◎ ESD HBM (Human Body Mode) / 2KV
- ※ D1 Red LED on indicates SSD Power ready
- ※ D2 Red LED Blinking indicates SSD active status

## Specifications

- ※ Compliant with USB 3.1 Specification Revision 1.0
- ※ Support UASP and Mass Storage Class Overview Rev1.4
- ※ Support SATA Reversion 3.2
- ※ PCI Express Mini Card Electromechanical Specification 1.2

## mSATA SSD Form Factor Support :

- ※ Full size : 50.95mm(L) x 30mm(W)
- ※ Half Size : 26.8mm(L) x 30mm(W)

*Notice : CFast Card or mSATA SSD, only one can work, mSATA SSD would be priority.*