


U.2 male to U.2 female Adapter with 12V & 3.3V Aux Hot plug power protection & 3.5" Housing

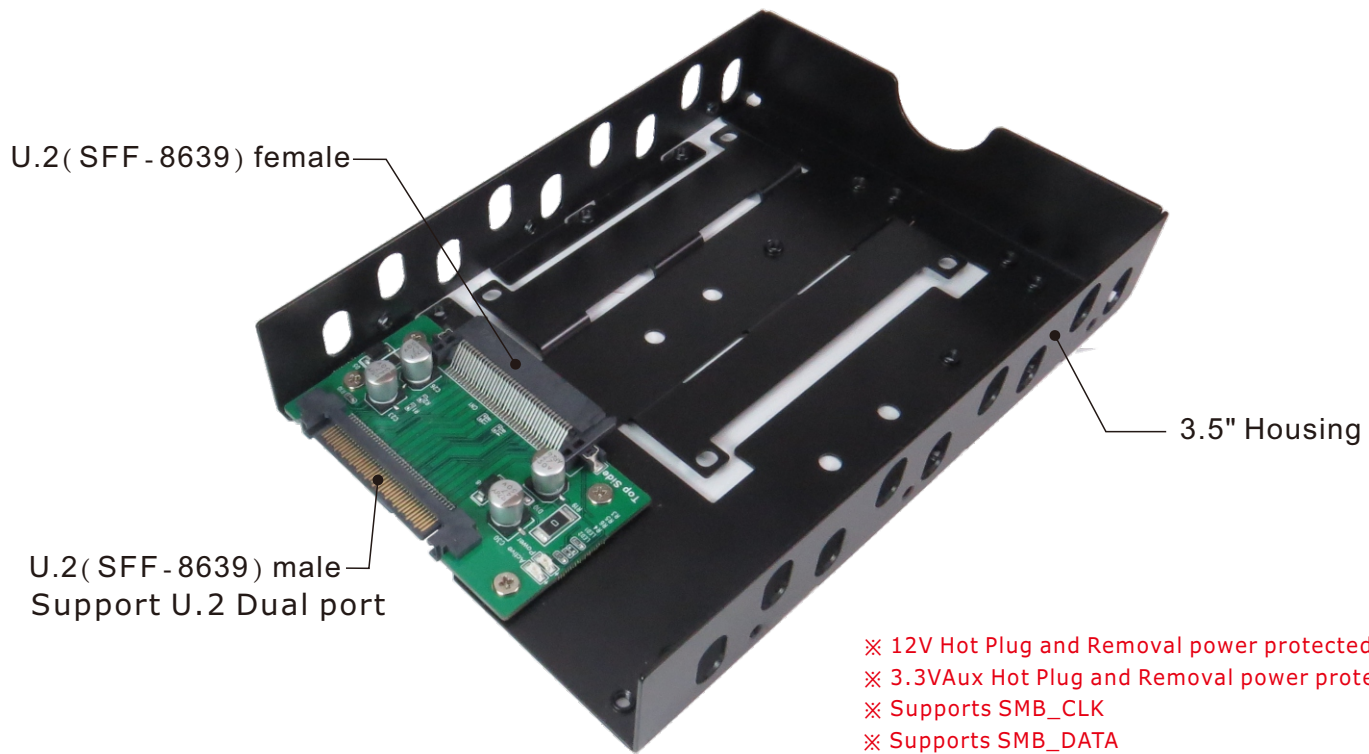

- ※ 12V Hot Plug and Removal power protected circuit
- ※ 3.3VAux Hot Plug and Removal power protected circuit
- ※ Supports SMB_CLK
- ※ Supports SMB_DATA

Features

- ※ Build in U.2(SFF-8639) Female connector
- ※ Build in U.2(SFF-8639) Male connector
- ※ 12V Hot Plug and Removal power protected circuit
- ※ 3.3VAux Hot Plug and Removal power protected circuit
- ※ Supports SMB_CLK
- ※ Supports SMB_DATA
- ※ Supports U.2 Daul port design
- ※ Supports PCIe RefClk0p, RefClk0n & RefClk1p, RefClk1n
- ※ Supports PCIe ePERst0, ePERst1
- ※ D1 Green LED on indicates U.2 NVMe SSD power ready
- ※ D2 RED LED Blinking indicates U.2 SSD active status

Specifications

- ※ Compliant with NVM Express 1.0a
- ※ Support PCI Express Base Specification Rev 3.0
- ※ Support SSD_Form_Factor_Version1_a
- ※ Compliant with SFF-8639 Specification Rev 2.0
- ※ Compliant with SFF-8323 Rev1.6
- ※ For 3.5" Form Factor Drive with Serial Attached Connector