

U.2 (SFF-8639) to M.2 PCI-e I/F SSD Adapter Assembly Guide






Features

- 4-Layer PCB designed
- Built-in SFF-8639 plug connector
- Built-in M.2 (NGFF) M-key receptacle connector
- LED2 ON indicate M.2/PCI-e 4 Lanes device power OK
- LED3 indicate active status


Before Assembly

- Please read through the installation guide first.
- Please check the accessory list before the integration.
Contact your local distributor if you find any parts missing.
- Please retain the original package if you need to return the package for RMA.

Assembling Accessories

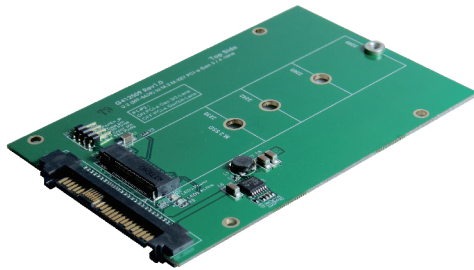			
M3x3 Screw*1	M3x5 Screw*1	M3 Nut*1	Copper Nut H: 1.45mm*1
			
Adapter *1			

Assembly




STEP 1. Make M.2 SSD Stand

Put copper nut on the same side of the NGFF connector.
Fix with M3x5mm screw from top to bottom of the adapter.


STEP 2. Insert M.2 SSD

Insert M.2 NGFF SSD into M.2 67pin connector.
Press down M.2 NGFF SSD and aim to the copper nut hole.



STEP 3. Fix M.2 SSD

Use M3 nut to fix M.2 NGFF SSD on the adapter, namely complete the assembly.



STEP 4. Fix 2280 M.2 SSD

If your M.2 NGFF SSD is 2280,
pls ignore step 1~3 .Use M3 x 3 Screw to fix M.2 SSD.

